


RoHS Compliant

REMARK

1. Glass Thk: 1.1mm
2. Film Type: Non-Glare
3. Total Thk: 1.35±0.15mm
4. Linearity: ±1.8% or less
5. Transmittance: 80% or more
6. Resistance
 100<Glass(Y)>1200 ohm
 100<Film(X)>1200 ohm
7. Connector: FPC
8. General Tolerance: ±0.3


CIRCUIT DIAGRAM

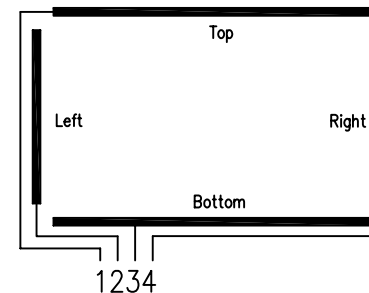




SIGNAL ASSIGNMENT

Pin No	Signal
1	Top
2	Left
3	Bottom
4	Right

Detail "AA"

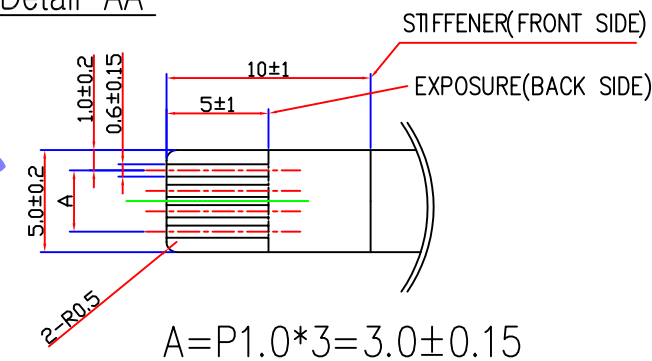

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing. This quality and performance document can be viewed at: www.hantouchUSA.com, under Incoming Inspection Standards.

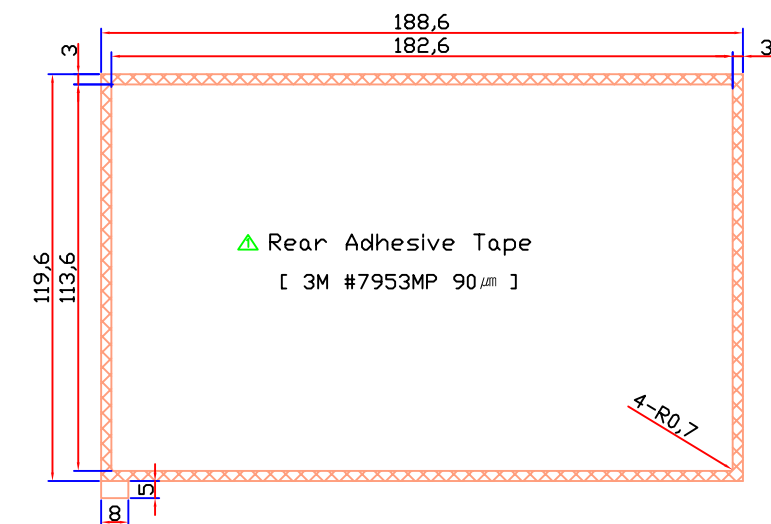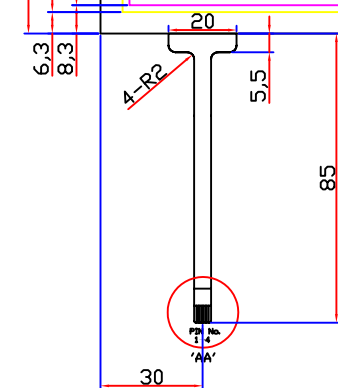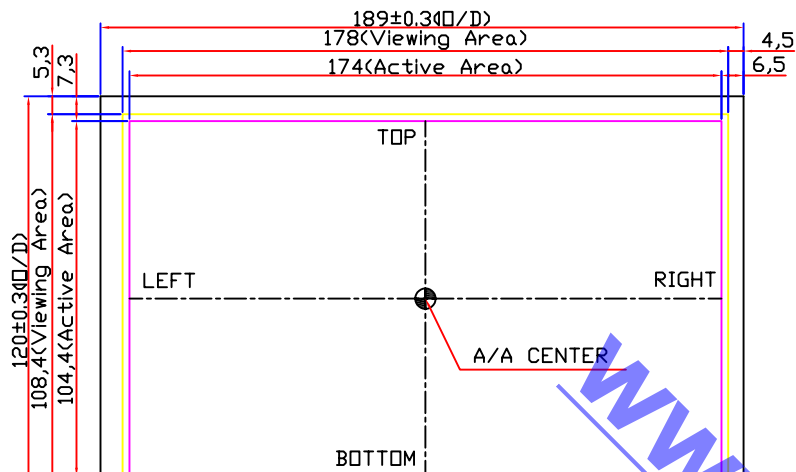

REV.No.	REVISED	DATE	DRAWN	CHECKED	APPROVED	DRAW	APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
1	△ Add a Rear DAT	06.09.26	H.Y. IM	K.B. KIM	T.S. KANG	CHECK		±0.3	SCALE	NONE	H3080A-NDJHB87-R	
0	NEW DRAW	06.01.07	H.Y. IM			DESIGN					DESCRIPTION	SHEET
											8.0" TOUCH PANEL	1/1