



LP141WX5
Liquid Crystal Display

Product Specification

SPECIFICATION FOR APPROVAL

(◆) Preliminary Specification

() Final Specification

Title	14.1" WXGA TFT LCD
-------	--------------------

Customer	
MODEL	

SUPPLIER	LG Display Co., Ltd.
*MODEL	LP141WX5
Suffix	TPP1

*When you obtain standard approval,
please use the above model name without suffix

APPROVED BY	SIGNATURE
/	_____
/	_____
/	_____

Please return 1 copy for your confirmation with your signature and comments.

APPROVED BY	SIGNATURE
H.S. Kim / G.Manager	_____
REVIEWED BY	
Y. S. Ha / Manager	_____
PREPARED BY	
K.Y. Kwon / Engineer	
C.Y. Jung / Engineer	_____

Products Engineering Dept.
LG Display Co., Ltd



LP141WX5
Liquid Crystal Display

Product Specification


Contents

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTERISTICS	6
3-2	INTERFACE CONNECTION	7
3-3	eDP SIGNAL TIMING SPECIFICATIONS	8
3-4	SIGNAL TIMING SPECIFICATIONS	10
3-5	SIGNAL TIMING WAVEFORMS	10
3-6	COLOR INPUT DATA REFERENCE	11
3-7	POWER SEQUENCE	12
4	OPTICAL SPECIFICATIONS	13
5	MECHANICAL CHARACTERISTICS	16
A	APPENDIX. LPL PROPOSAL FOR SYSTEM COVER DESIGN	20-22
6	RELIABILITY	23
7	INTERNATIONAL STANDARDS	
7-1	SAFETY	24
7-2	EMC	24
8	PACKING	
8-1	DESIGNATION OF LOT MARK	25
8-2	PACKING FORM	25
9	PRECAUTIONS	26
A	APPENDIX. Enhanced Extended Display Identification Data	28-30

Product Specification

1. General Description

The LP141WX5 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 14.1 inches diagonally measured active display area with WXGA resolution (1280 horizontal by 800 vertical pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors. The LP141WX5 has been designed to apply the interface method that enables low power, high speed, low EMI. The LP141WX5 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP141WX5 characteristics provide an excellent flat display for office automation products such as Notebook PC.

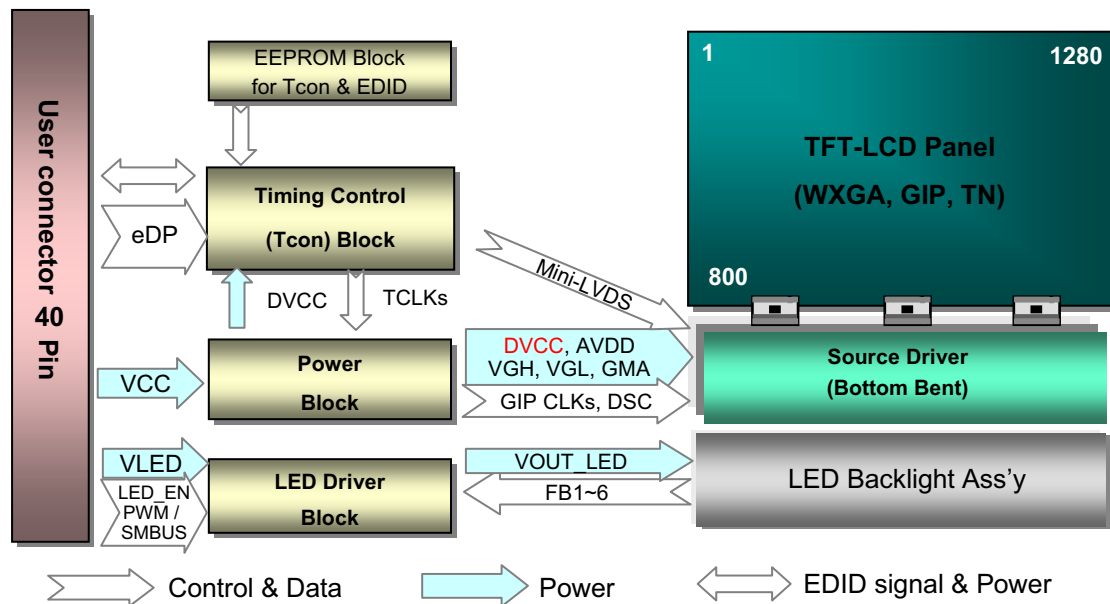

General Features

Active Screen Size	14.1 inches diagonal
Outline Dimension	319.5(H, Typ.) × 206.5(V, Typ.) × 5.5(D, Max.) mm
Pixel Pitch	0.2373mm X 0.2373 mm
Pixel Format	1280 horiz. by 800 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	220 cd/m ² (Typ., @ I _{LED} = 18 mA)
Power Consumption	Total 4.7 W(Typ.) Logic : 1.5 W (Typ.@ Mosaic), B/L : 3.2 W (Typ.@ 18mA)
Weight	375g (Max.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Anti-Glare treatment (3H) of the front Polarizer
RoHS Compliance	Yes
BFR / PVC / As Free	Yes for all

Product Specification


2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	HST	-20	60	°C	1
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.
 Wet bulb temperature should be 39°C Max, and no condensation of water.

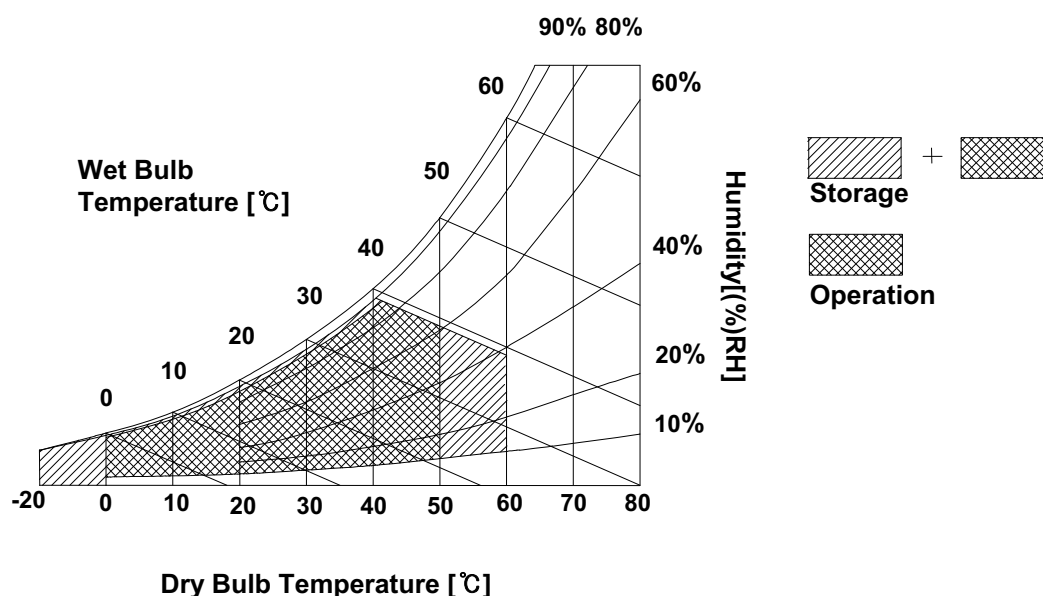



LP141WX5
Liquid Crystal Display

Product Specification

3. Electrical Specifications

3-1. Electrical Characteristics

The LP141WX5 requires two power inputs. The first logic is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second backlight is the input about LED BL with LED Driver.


Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
LOGIC :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V	1
Power Supply Input Current	Mosaic ICC	-	450	520	mA	2
Power Consumption	PCC	-	1.5	1.7	W	2
Power Supply Inrush Current	ICC_P	-	-	2000	mA	3
eDP Impedance	ZeDP	90	100	110	Ω	4
BACKLIGHT : (with LED Driver)						
LED Power Input Voltage	V _{LED}	7.5	12.0	21.0	V	5
LED Power Input Current	I _{LED}	-	18	21	mA	6
LED Power Consumption	P _{LED}	-	3.2	3.4	W	6
LED Power Inrush Current	I _{LED_P}	-	-	2000	mA	7
PWM Duty Ratio		5	-	100	%	8
PWM Jitter	-	0	-	0.2	%	9
PWM Impedance	Z _{PWM}	20	40	60	k Ω	
PWM Frequency	F _{PWM}	200	-	1000	Hz	10
PWM High Level Voltage	V _{PWM_H}	3.0	-	5.3	V	
PWM Low Level Voltage	V _{PWM_L}	0	-	0.3	V	
LED_EN Impedance	Z _{PWM}	20	40	60	k Ω	
LED_EN High Voltage	V _{LED_EN_H}	3.0	-	5.3	V	
LED_EN Low Voltage	V _{LED_EN_L}	0	-	0.3	V	
Life Time		15,000	-	-	Hrs	11


Product Specification

Note)


1. The measuring position is the connector of LCM and the test conditions are under 25°C, $f_v = 60\text{Hz}$, Black pattern.
2. The specified I_{cc} current and power consumption are under the $V_{cc} = 3.3\text{V}$, 25°C, $f_v = 60\text{Hz}$ condition and Mosaic pattern.

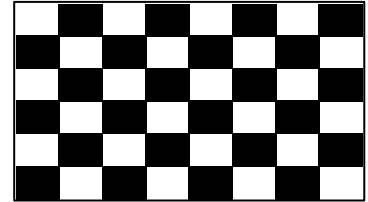

3. This Spec. is the max load condition for the cable impedance designing.
4. The below figures are the measuring V_{cc} condition and the V_{cc} control block LGD used.
The V_{cc} condition is same as the minimum of T1 at Power on sequence.

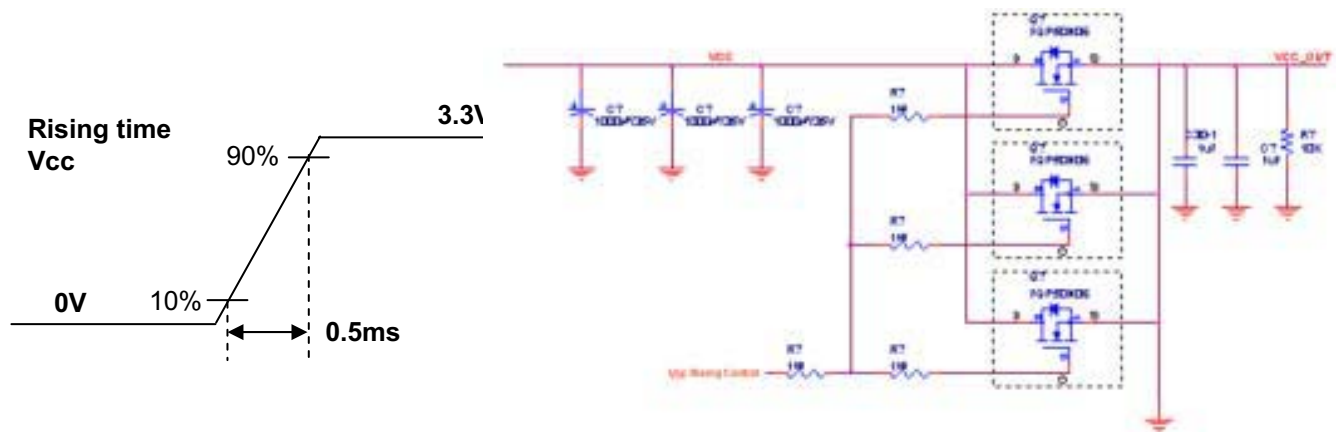

5. This impedance value is needed for proper display and measured from eDP Tx to the mating connector.
6. The measuring position is the connector of LCM and the test conditions are under 25°C.
7. The current and power consumption with LED Driver are under the $V_{led} = 12.0\text{V}$, 25°C, Dimming of Max luminance and White pattern with the normal frame frequency operated(60Hz).
8. The below figures are the measuring V_{led} condition and the V_{led} control block LGD used.
 V_{LED} control block is same with V_{cc} control block.

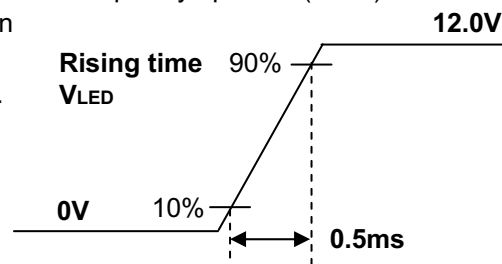

9. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.
10. If Jitter of PWM is bigger than maximum, it may induce flickering.
11. This Spec. is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.
12. The life time is determined as the sum of the continuous operation time at which brightness of LCD at the typical LED current is 50% compare to that of minimum value specified in table 7 under general user condition.




LP141WX5
Liquid Crystal Display

Product Specification

3-2. Interface Connections

This LCD employs two interface connections, a 30 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)


Pin	Symbol	Description	Notes
1	PAID	Conn. Continuity Test	<p>[Interface Chip] 1. LCD : IDT, VPP1420 (LCD Controller Including eDP Receiver. 2. System : TBD or equivalent * Pin to Pin compatible with eDP</p> <p>[Connector] CABLIN-VS RECE ASS'Y, I-PEX or its compatibles</p> <p>[Mating Connector] CABLIN-VS PLUG CABLE ASS'Y or equivalent.</p> <p>[Connector pin arrangement]</p>  <p>[LCD Module Rear View]</p>
2	GND	High Speed (Main Link) Ground	
3	Lane1_N	Complement Signal-Lane 1 (No Connection)	
4	Lane1_p	True Signal-Main Lane 1 (No Connection)	
5	GND	High Speed (Main Link) Ground	
6	Lane0_N	Complement Signal-Lane 0	
7	Lane0_p	True Signal-Main Lane 0	
8	GND	High Speed (Main Link) Ground	
9	AUX_P	True Signal-Auxiliary Channel	
10	AUX_N	Complement Signal-Auxiliary Channel	
11	GND	High Speed (Main Link) Ground	
12	VCC	LCD Logic and driver power (3.3V Typ.)	
13	VCC	LCD Logic and driver power (3.3V Typ.)	
14	BIST	LCD Panel Self Test Enable	
15	GND	Ground	
16	GND	Ground	
17	HPD	HPD signal pin	
18	GND	LED Backlight Ground	
19	GND	LED Backlight Ground	
20	GND	LED Backlight Ground	
21	GND	LED Backlight Ground	
22	LED_EN (NC)	LED Backlight On/Off	
23	PWM	System PWM Signal input for dimming	
24	SMBUS_CLK	Backlight Control Clk	
25	SMBUS_DATA	Backlight Control Data	
26	VLED	LED Backlight Power (7.5V-21V)	
27	VLED	LED Backlight Power (7.5V-21V)	
28	VLED	LED Backlight Power (7.5V-21V)	
29	VLED	LED Backlight Power (7.5V-21V)	
30	PAID	Conn. Continuity Test	

Product Specification

3-3. eDP Signal Timing Specifications

3-3-1. DC Specification

The VESA Display Port related AC specification is compliant with the VESA Display Port Standard v1.1a.

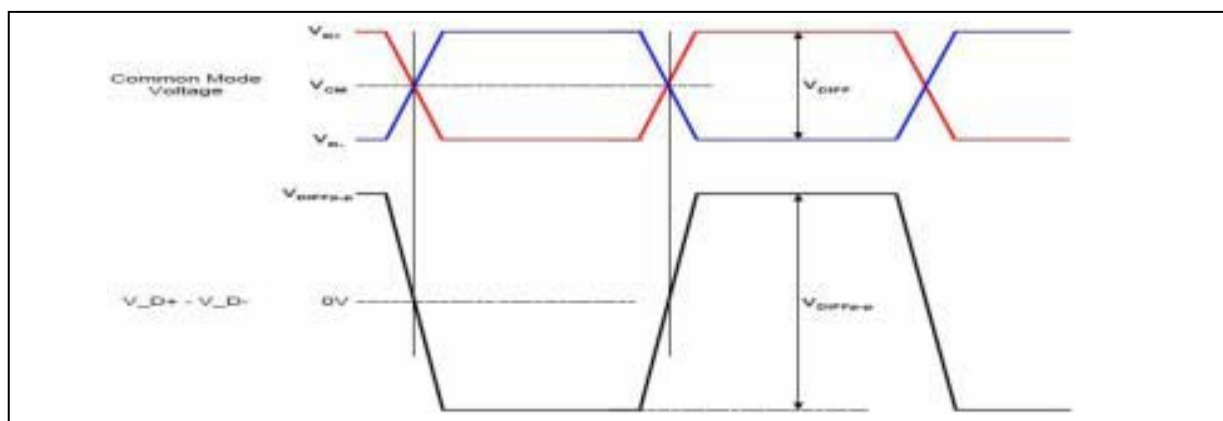

Description	Symbol	Min	Max	Unit	Notes
Differential peak-to-peak Input voltage	VDIFF p-p	120	-	mV	For high bit rate
		40	-		For reduced bit rate
Rx DC common mode voltage	VCM	0	2.0	V	-

3-3-2. AC Specification

The VESA Display Port related AC specification is compliant with the VESA Display Port Standard v1.1a.

Description	Symbol	Min	Typ	Max	Unit	Notes
Unit Interval for high bit rate (2.7Gbps/lane)	UI_High_Rate	-	370	-	ps	Range is nominal ± 350 ppm. DisplayPort Link Rx does not require local crystal for link clock generation
Unit Interval for high bit rate (1.62Gbps/lane)	UI_Low_Rate	-	617	-	ps	
Lane-to-Lane skew	V Rx-SKEW-INTER_PAIR	-	-	5200	ps	-
Lane intra-pair skew	V Rx-SKEW-INTRA_PAIR	-	-	100	ps	For high bit rate
		-	-	300	ps	For reduced bit rate

3-4. Signal Timing Specifications

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of eDP Tx/Rx for its proper operation.


Table 4. TIMING TABLE

ITEM	Symbol	Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	-	74.8	-	MHz
Hsync	Period	T_{hp}	1376	1472	1600	tCLK
	Width	t_{WH}	32	44	56	
	Width-Active	t_{WHA}	1280	1280	1280	
Vsync	Period	t_{VP}	807	846	885	tHP
	Width	t_{WV}	2	8	16	
	Width-Active	t_{WVA}	800	800	800	
Data Enable	Horizontal back porch	t_{HBP}	32	94	172	tCLK
	Horizontal front porch	t_{HFP}	32	54	92	
	Vertical back porch	t_{VBP}	4	29	54	tHP
	Vertical front porch	t_{VFP}	1	9	18	

3-5. Signal Timing Waveforms

Condition : VCC = 3.3V

Data Enable, Hsync, Vsync

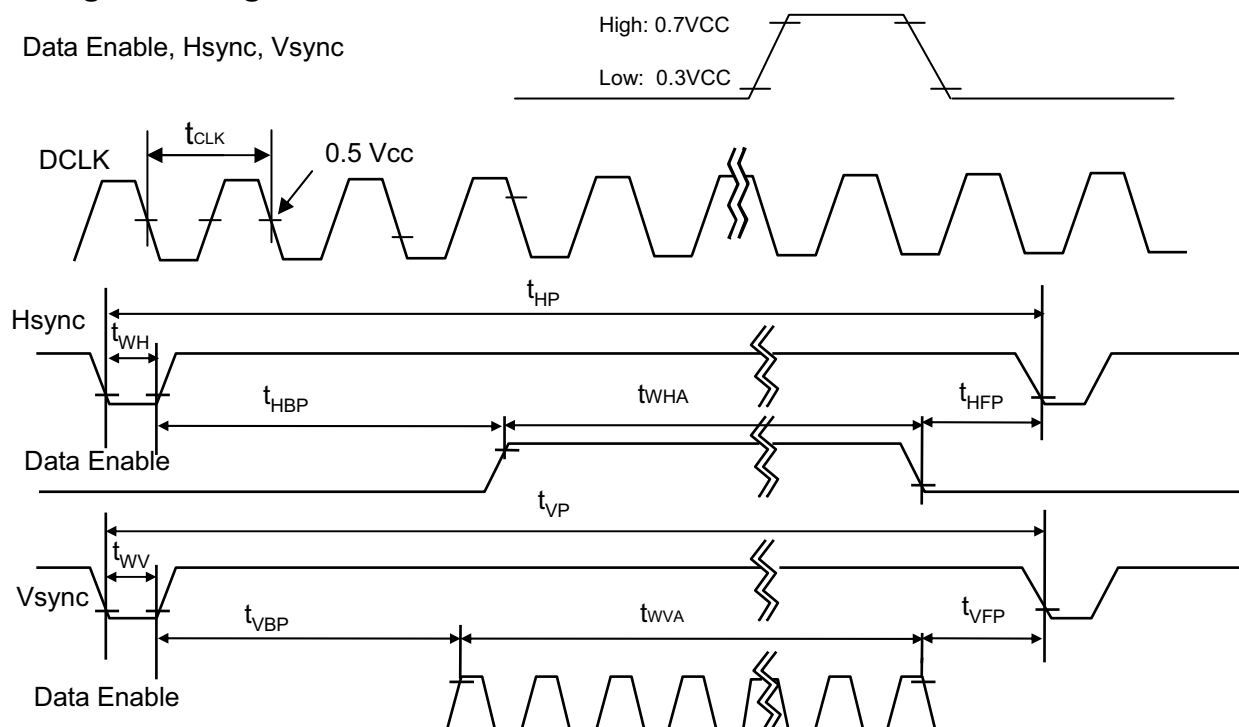



LP141WX5
Liquid Crystal Display

Product Specification

3-6. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 5. COLOR DATA REFERENCE

Color		Input Color Data																	
		RED						GREEN						BLUE					
		MSB				LSB		MSB				LSB		MSB		LSB			
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
					
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
					
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
					
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1



LP141WX5
Liquid Crystal Display

Product Specification

3-7. Power Sequence

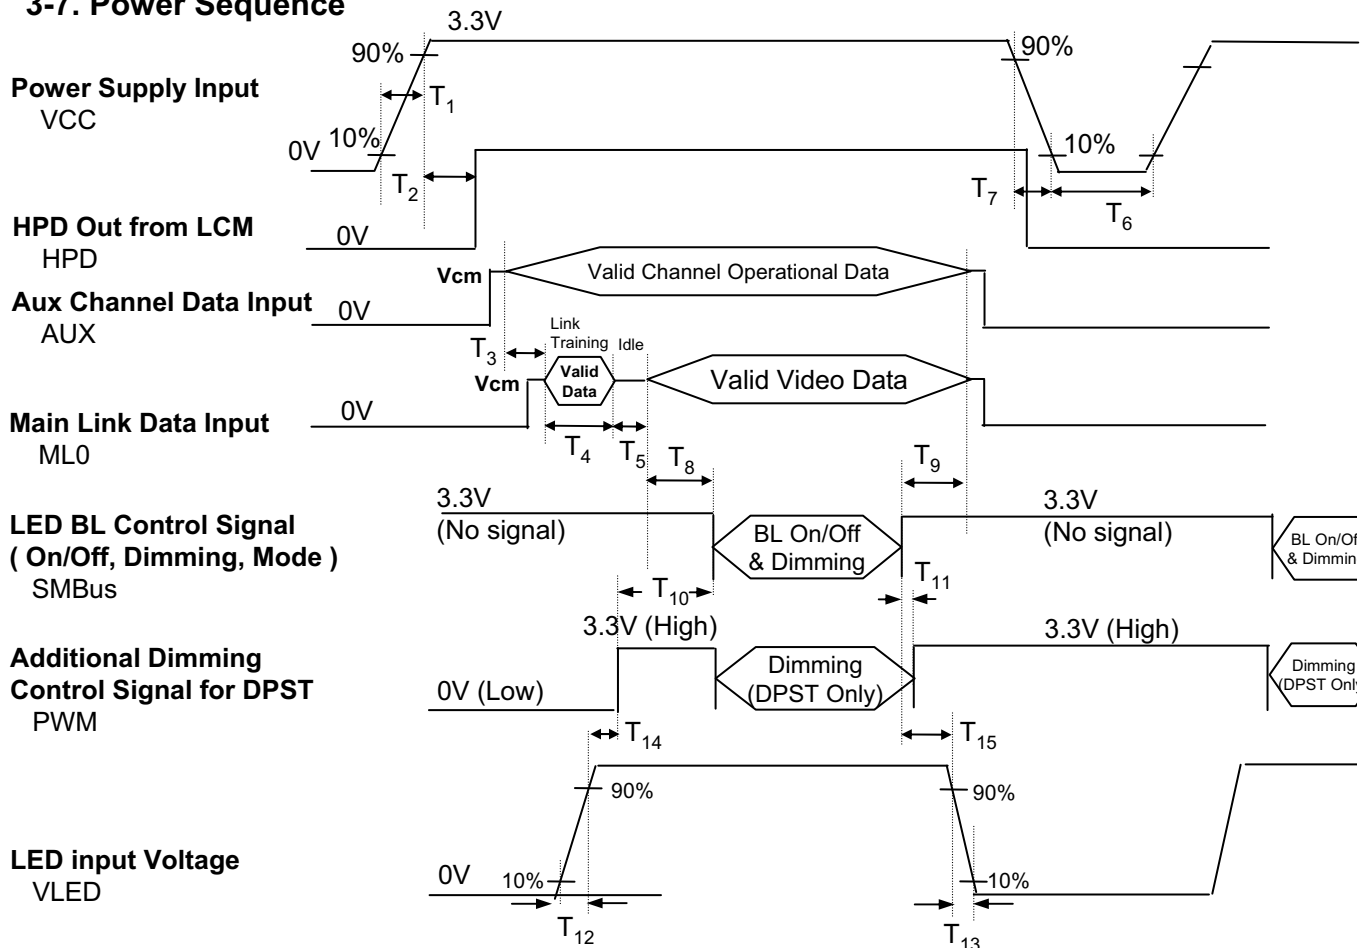


Table 6. POWER SEQUENCE TABLE

Logic Parameter	Value			Units	LED Parameter	Value			Units
	Min.	Typ.	Max.			Min.	Typ.	Max.	
T ₁	0.5	-	10	ms	T ₉	200	-	-	ms
T ₂	0	-	200	ms	T ₁₀	200	-	-	ms
T ₃	50	75	-	ms	T ₁₁	0	-	50	ms
T ₄	0	-	-	ms	T ₁₂	0.5	-	-	ms
T ₅	0	-	-	ms	T ₁₃	0	-	5000	ms
T ₆	500	-	-	ms	T ₁₄	0	-	-	ms
T ₇	3	-	10	ms	T ₁₅	50	-	-	ms
T ₈	200	-	-	ms					

Note)

1. Do not insert the mating cable when system turn on.
2. Valid Data have to meet "3-3. eDP Signal Timing Specifications"
3. LVDS, LED_EN and PWM need to be on pull-down condition on invalid status.
4. LGD recommend the rising sequence of VLED after the Vcc and valid status of LVDS turn on.

Product Specification

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

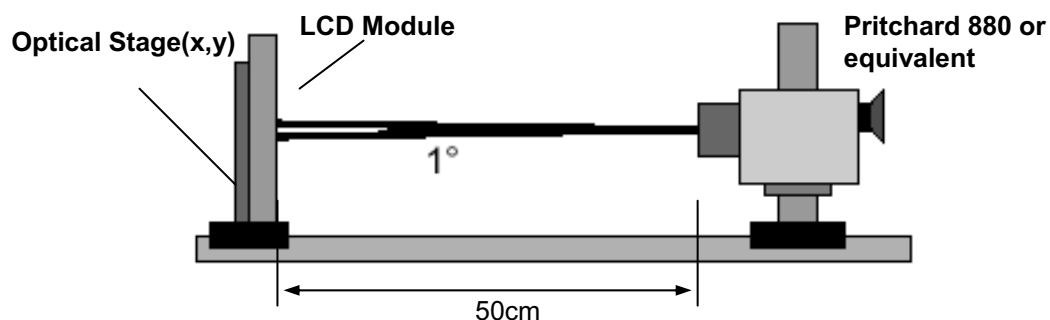


Table 7. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fv=60Hz, fCLK= 69.3MHz

Parameter	Symbol	Values			Units	Notes
		Min	Typ	Max		
Contrast Ratio	CR	300	-	-		1
Surface Luminance, white	L _{WH}	200	220	-	cd/m ²	2
Luminance Variation	δ_{WHITE}	-	1.4	1.6		3
Response Time	T _{R+} T _{R-}		16		ms	4
Color Coordinates						
RED	RX	0.550	0.580	0.610		
	RY	0.315	0.345	0.375		
GREEN	GX	0.307	0.337	0.367		
	GY	0.526	0.556	0.586		
BLUE	BX	0.129	0.159	0.189		
	BY	0.104	0.134	0.164		
WHITE	WX	0.283	0.313	0.343		
	WY	0.299	0.329	0.359		
Viewing Angle						
x axis, right($\Phi=0^\circ$)	Θ_r	40	45	-	degree	5
x axis, left ($\Phi=180^\circ$)	Θ_l	40	45	-	degree	
y axis, up ($\Phi=90^\circ$)	Θ_u	10	15	-	degree	
y axis, down ($\Phi=270^\circ$)	Θ_d	30	35	-	degree	
Gray Scale			2.2			6



LP141WX5
Liquid Crystal Display

Product Specification

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{\text{WH}} = \text{Average}(L_1, L_2, \dots, L_5)$$

3. The variation in surface luminance, The panel total variation (δ_{WHITE}) is determined by measuring L_N at each test position 1 through 13 and then defined as following numerical formula. For more information see FIG 2.

$$\delta_{\text{WHITE}} = \frac{\text{Maximum}(L_1, L_2, \dots, L_{13})}{\text{Minimum}(L_1, L_2, \dots, L_{13})}$$

4. Response time is the time required for the display to transition from white to black (rise time, Tr_R) and from black to white(Decay Time, Tr_D). For additional information see FIG 3.

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification

* $f_v = 60\text{Hz}$

Gray Level	Luminance [%] (Typ)
L0	0.2
L7	1.7
L15	5.8
L23	12.5
L31	21.6
L39	35.8
L47	54.8
L55	77.5
L63	100

Product Specification

FIG. 2 Luminance

<measuring point for surface luminance & measuring point for luminance variation>

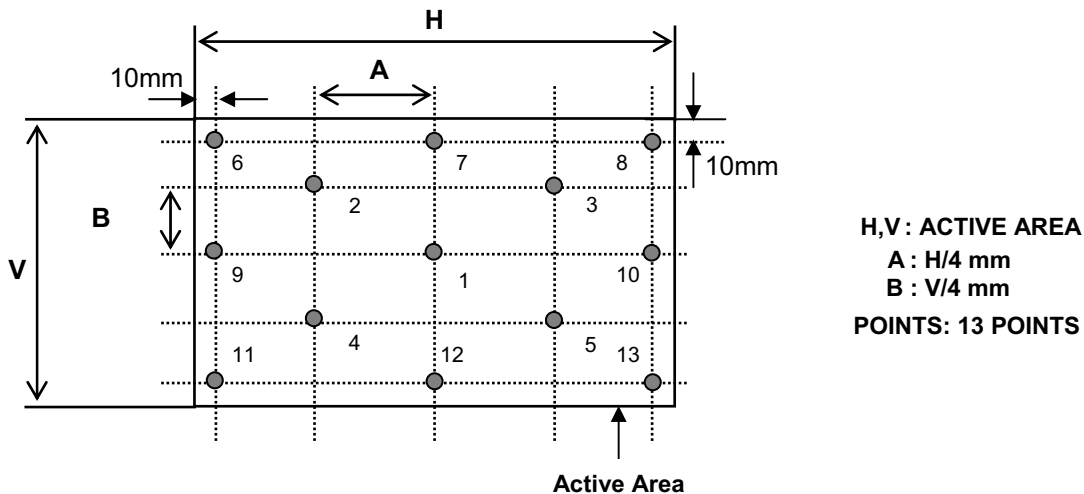


FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for “black” and “white”.


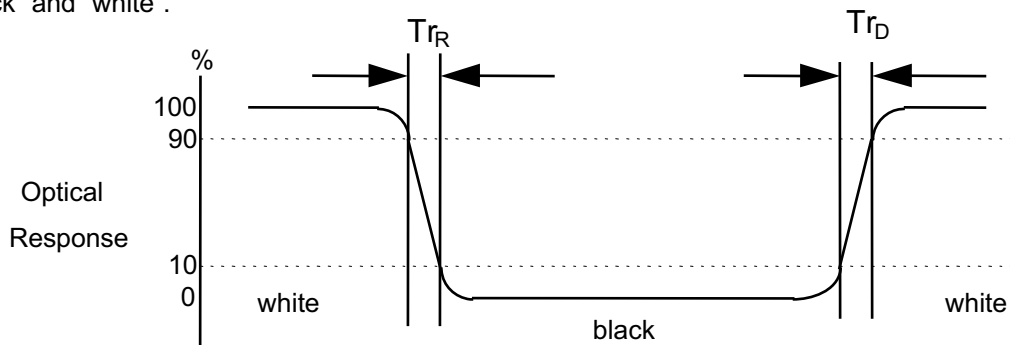


FIG. 4 Viewing angle



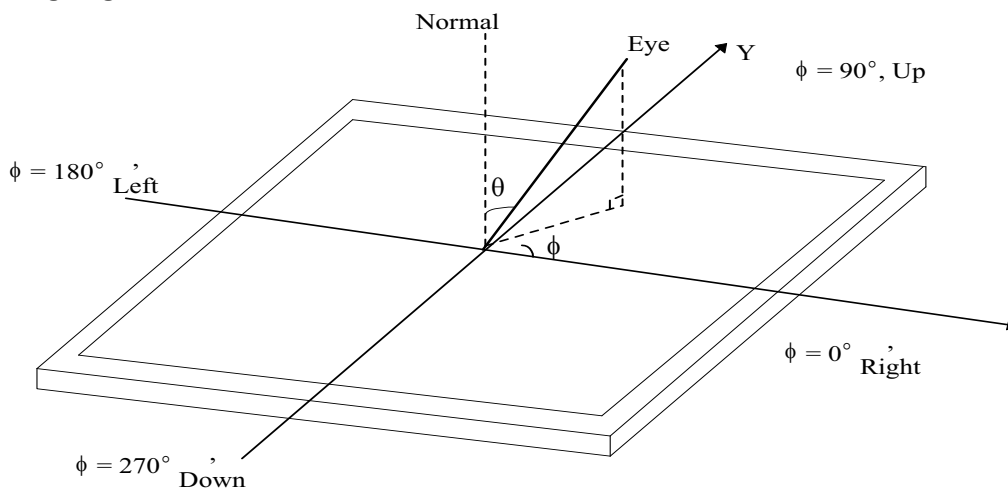

LP141WX5
Liquid Crystal Display

Product Specification

5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP141WX5. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	319.5 ± 0.5mm
	Vertical	206.5 ± 0.5mm
	Thickness	5.5mm (max.)
Bezel Area	Horizontal	312.5 ± 0.5mm
	Vertical	193.8 ± 0.5mm
Active Display Area	Horizontal	303.74 mm
	Vertical	189.84 mm
Weight	375g (Max.)	
Surface Treatment	Anti-glare treatment of the front polarizer	




LP141WX5
Liquid Crystal Display

Product Specification

<FRONT VIEW>

Note) Unit:[mm], General tolerance: ± 0.5mm

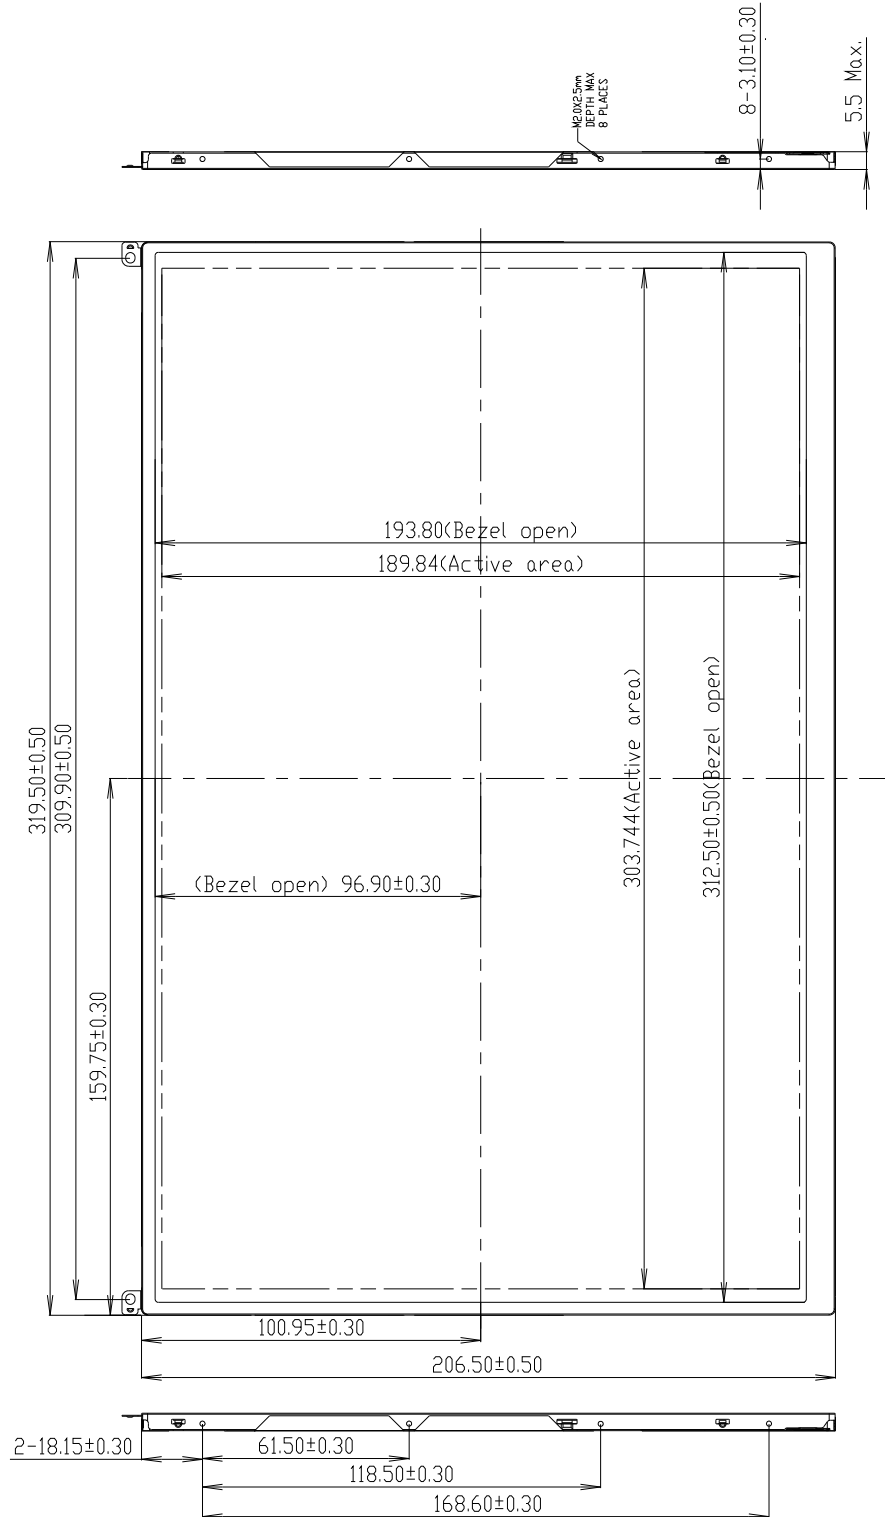




LP141WX5
Liquid Crystal Display

Product Specification

<REAR VIEW>

Note) Unit:[mm], General tolerance: ± 0.5mm

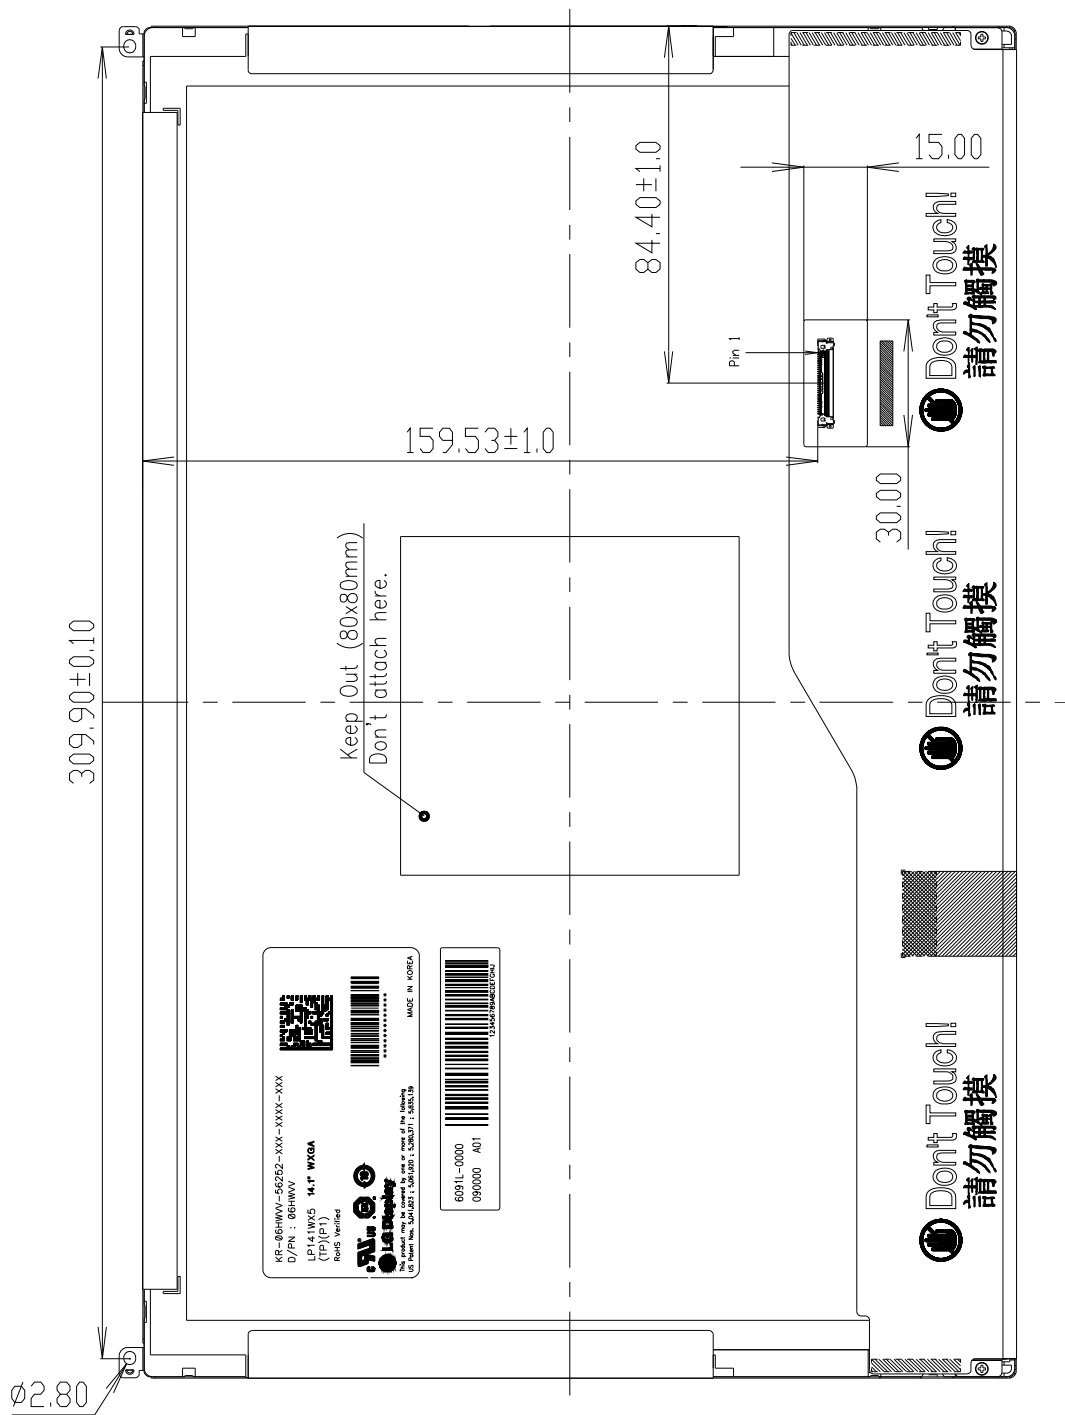




LP141WX5
Liquid Crystal Display

Product Specification


[DETAIL DESCRIPTION OF SIDE MOUNTING SCREW]

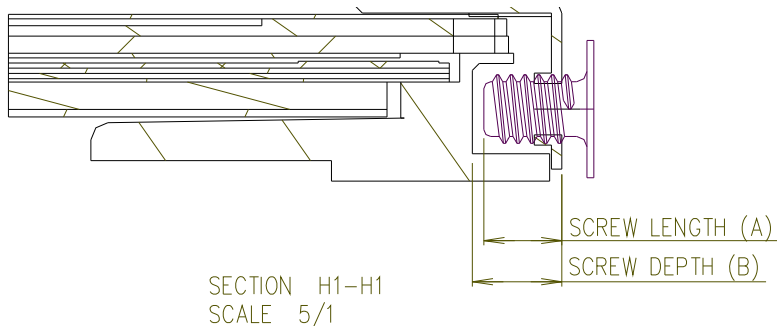

- * Mounting Screw Length (A)
= 2.0(Min) / 2.5(Max)
- * Mounting Screw Hole Depth (B)
= 2.5(Min)
- * Mounting hole location : 3.7(typ.)
- * Torque : 2.5 kgf.cm(Max)
(Measurement gauge : torque meter)

Notes : 1. Screw plated through the method of non-electrolytic nickel plating is preferred to reduce possibility that results in vertical and/or horizontal line defect due to the conductive particles from screw surface.

[DETAIL INFORMATION OF PPID LABEL AND REVISION CODE]

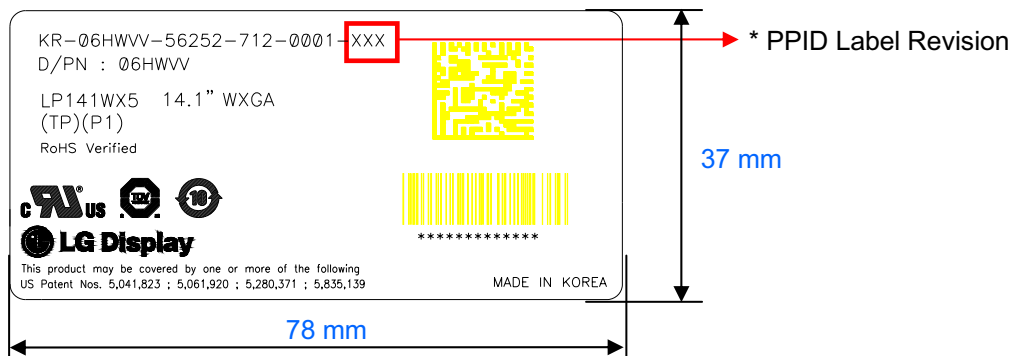

* PPID Label Revision :
It is subject to change with Dell event. Please refer to the below table for detail.

Classification	No Change	1st Revision	2nd Revision	...	9th Revision	...
SST(WS)	X00	X01	X02	...	A09	...
PT(ES)	X10	X11	X12	...	A19	...
ST(CS)	X20	X21	X22	...	A29	...
XB(MP)	A00	A01	A02	...	A09	...

LGD Proposal for system cover design.(Appendix)

1	Gap check for securing the enough gap between LCM and System cover.	
<p>The diagram illustrates the assembly of the LCM (Liquid Crystal Module) and the system cover. On the left, a top-down view of the LCM reflector side is shown with various colored regions (blue, yellow, pink, cyan). To the right, a cross-sectional view shows the LCM assembly with a 'Max Thickness' dimension line. A 'Boundary Line' is indicated by a red dashed line. A 'Sponge' is placed between the LCM and the 'System Cover' to provide cushioning. Arrows point from the sponge and cover towards the LCM.</p>		
Define	<p>1.Rear side of LCM is sensitive against external stress,and previous check about interference is highly needed.</p> <p>2.In case there is something from system cover comes into the boundary above,mechanical interference may cause the FOS defects. (Eg:Ripple,White spot..)</p>	
2	Check if antenna cable is sufficiently apart from T-CON of LCD Module.	
Define	<p>Two diagrams illustrate the correct placement of the antenna cable relative to the T-CON (Timing Controller) on the LCD module. The left diagram, labeled 'NO GOOD', shows the antenna cable overlapping with the T-CON. The right diagram, labeled 'GOOD', shows the antenna cable positioned away from the T-CON. Labels include 'Antenna', 'T-CON', and 'Antenna Cable'.</p>	
1.If system antenna is overlapped with T-CON,it might be cause the noise.		





LP141WX5
Liquid Crystal Display

Product Specification

LGD Proposal for system cover design.

3	Gap check for securing the enough gap between LCM and System hinge.	
<p>The diagram illustrates the LCM Reflector Side assembly. It shows a top view with a pink LCM Reflector Side, a blue COF (D-IC) area, and a yellow wire path. A red side mount screw hole is shown on the left. A hinge is attached to the bottom right, with a minimum gap of 2.0mm between the LCM and the hinge. Two cross-sectional views are provided: the 'I' TYPE hinge, which has a flat top surface, and the 'L' TYPE hinge, which has a curved top surface. The 'L' TYPE is recommended for better shock resistance.</p>		
Define	<p>1. At least 2.0mm of gap needs to be secured to prevent the shock related defects.</p> <p>2. "L" type of hinge is recommended than "I" type under shock test.</p>	
4	Checking the path of the System wire.	
<p>The diagram shows the LCM Reflector Side with three different wire path designs. The 'Ok' path is a yellow line that stays between the COF areas. The 'Bad' path is a red line that overlaps with the COF area, indicated by a red starburst. The 'Good' path is a blue line that runs along the system side. Labels 'Ok', 'Bad', and 'Good' are placed below their respective paths.</p>		
Define	<p>1. COF area needs to be handled with care.</p> <p>2. GOOD → Wire path design to system side. OK → Wire path is located between COFs. BAD → Wire path overlapped with COF area.</p>	

LGD Proposal for system cover design.

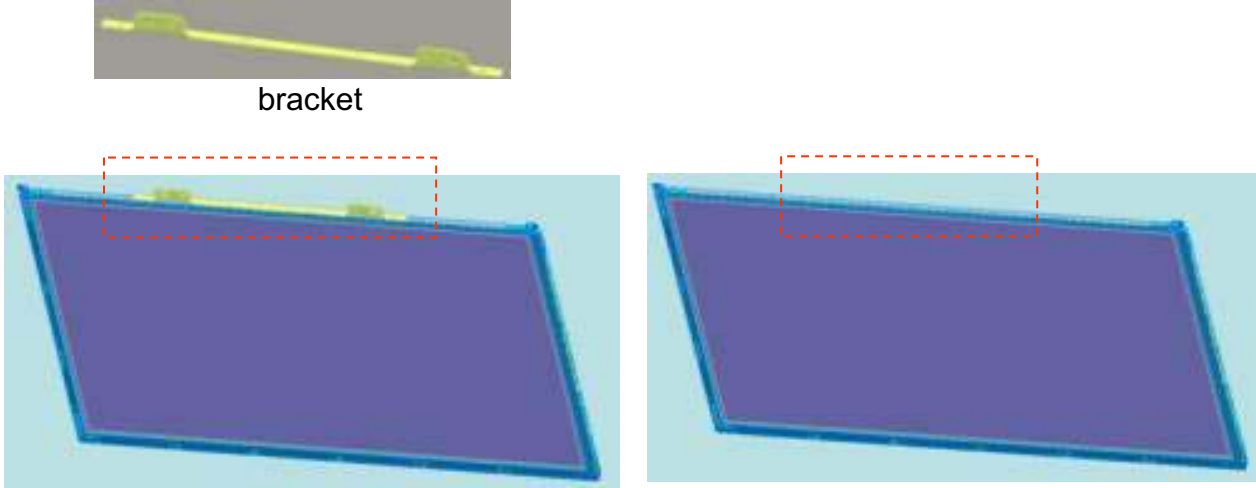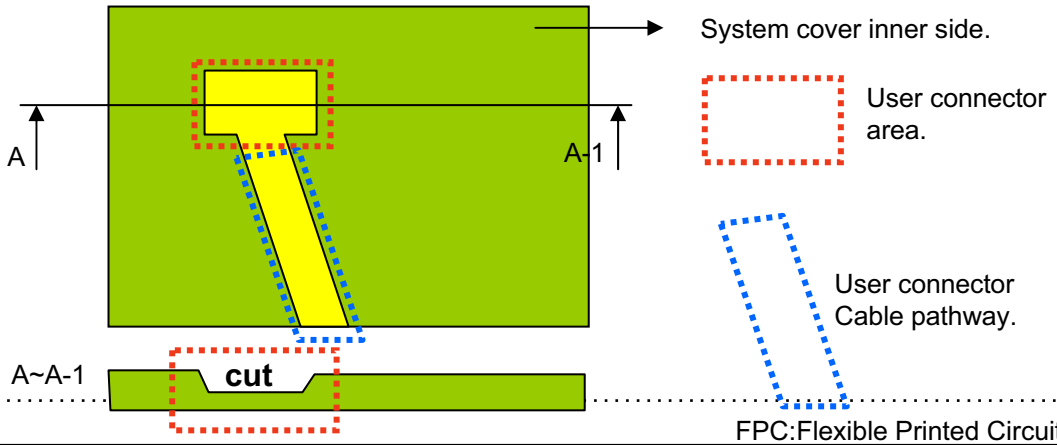5	Using a bracket on the top of LCM is not recommended.	
 <p>The diagram illustrates the proposed design change. At the top, a yellow bracket is shown. Below it, two views of the LCM are presented: 'With bracket' and 'Without bracket'. Red dashed boxes highlight the bracket's position on the top edge of the LCM in both views.</p>		
Define	<p>1.Condition without bracket is good for mechanical noise,and can minimize the light leakage from deformation of bracket.</p> <p>2.The results shows that there is no difference between the condition with or without bracket.</p>	
6	Securing additional gap on CNT area..	
 <p>The diagram shows the 'System cover inner side' in green. A yellow T-shaped component is attached to the cover. A red dashed box highlights a 'cut' in the cover material. A blue dashed line indicates the 'User connector Cable pathway'. A red dashed box also highlights the 'User connector area'. Section lines A-A and A-1 are shown. The text 'FPC:Flexible Printed Circuit.' is at the bottom right.</p>		
Define	<p>1.CNT area is specially sensitive against external stress,and additional gap by cutting on system cover will be helpful on removing the Ripple.</p> <p>2.Using a thinner CNT will be better. (eg: FPC type)</p>	



LP141WX5
Liquid Crystal Display

Product Specification

LGD Proposal for system cover design.


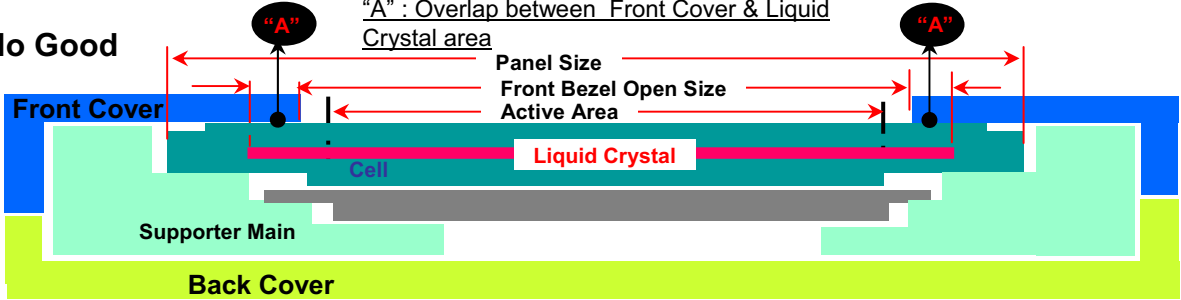
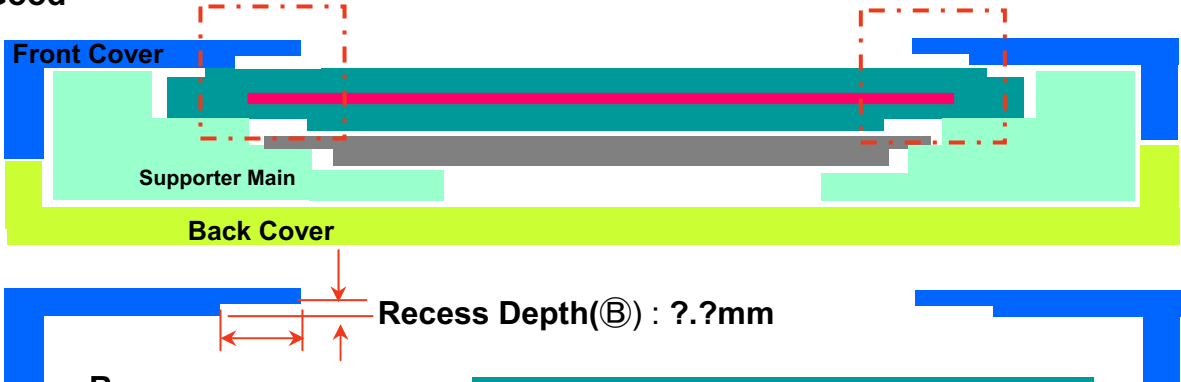
7	Checking the path of System LVDS Cable.
Notes	<ol style="list-style-type: none"> 1. At least 1.0mm gap (Ⓐ) is required to secure from any damage by overlapping system cable and LCM (This overlap may cause a Abnormal Display after hinge test) 2."Flat" type of LVDS cable is more recommended than "Cylindrical" type . 3. Making LVDS Cable Guide will give better performance (Refer to detail "A")



LP141WX5
Liquid Crystal Display

Product Specification

LGD Proposal for system cover design.

8	Securing additional gap between front cover & LCD at edge of front cover.
<div style="text-align: center;">  </div> <p style="text-align: center;">"A" : Overlap between Front Cover & Liquid Crystal area</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>No Good</p>  </div> <div style="text-align: center;"> <p>Good</p>  <p>Resses Width(A) : ?.?mm</p> <p>Recess Depth(B) : ?.?mm</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> <p>※ Recess Width(A) : Up / Down /Left /Right</p> <p>※ Recess Depth(B) : Up / Down /Left /Right</p> </div> </div> </div>	
Notes	<p>1.Active area which is filled with Liquid Crystal is sensitive to external stress, so additional gap to make recess area on the edge of front cover will be helpful to prevent mechanical Ripple. (Dimension of Recess depends on each model design)</p>



LP141WX5
Liquid Crystal Display

Product Specification

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

7. International Standards

7-1. Safety

- a) UL 60950-1, Second Edition, Underwriters Laboratories Inc.
Information Technology Equipment - Safety - Part 1 : General Requirements.
- b) CAN/CSA C22.2 No.60950-1-07, Second Edition, Canadian Standards Association.
Information Technology Equipment - Safety - Part 1 : General Requirements.
- c) EN 60950-1:2006 + A11:2009, European Committee for Electrotechnical Standardization (CENELEC).
Information Technology Equipment - Safety - Part 1 : General Requirements.
- d) IEC 60950-1:2005, Second Edition, The International Electrotechnical Commission (IEC).
Information Technology Equipment - Safety - Part 1 : General Requirements.

7-2. EMC

- a) ANSI C63.4 "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz." American National Standards Institute (ANSI), 2003.
- b) CISPR 22 "Information technology equipment – Radio disturbance characteristics – Limit and methods of measurement." International Special Committee on Radio Interference (CISPR), 2005.
- c) CISPR 13 "Sound and television broadcast receivers and associated equipment – Radio disturbance characteristics – Limits and method of measurement." International Special Committee on Radio Interference (CISPR), 2006.

7-3. Environment

- a) RoHS, Directive 2002/95/EC of the European Parliament and of the council of 27 January 2003



LP141WX5
Liquid Crystal Display

Product Specification

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)
E : MONTH

D : YEAR
F ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one box : 30 pcs

b) Box Size : 490mm × 393mm × 284mm

LP141WX5
Liquid Crystal Display

Product Specification

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
 $V = \pm 200\text{mV}$ (Over and under shoot voltage)
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.

LP141WX5
Liquid Crystal Display

Product Specification

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer.
This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



LP141WX5
Liquid Crystal Display

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
0	Header	00	00000000
1	Header	FF	11111111
2	Header	FF	11111111
3	Header	FF	11111111
4	Header	FF	11111111
5	Header	FF	11111111
6	Header	FF	11111111
7	Header	00	00000000
8	ID Manufacture Name LGD	30	00110000
9	ID Manufacture Name	E4	11100100
10	ID Product Code 0249h	49	01001001
11	0B (Hex. LSB first)	02	00000010
12	ID Serial No. - Optional ("00h" if not used, Number Only and LSB First)	00	00000000
13	ID Serial No. - Optional ("00h" if not used, Number Only and LSB First)	00	00000000
14	ID Serial No. - Optional ("00h" if not used, Number Only and LSB First)	00	00000000
15	ID Serial No. - Optional ("00h" if not used, Number Only and LSB First)	00	00000000
16	Week of Manufacture - Optinal 00 weeks	00	00000000
17	Year of Manufacture 2010 years	14	00010100
18	EDID structure version # = 1	01	00000001
19	EDID revision # = 4	04	00000100
20	14 Video input Definition = Input is a Digital Video signal Interface , Colo Bit Depth : 6 Bits per Primary Color , Digital Video Interface Standard Supported: DisplayPort is supported	95	10010101
21	15 Horizontal Screen Size (Rounded cm) = 30 cm	1E	00011110
22	16 Vertical Screen Size (Rounded cm) = 19 cm	13	00010011
23	17 Display Transfer Characteristic (Gamma) = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma	78	01111000
24	18 Feature Support [Display Power Management(DPM) : Standby Mode is not supported, Suspend Mode is not supported, Active Off = Very Low Power is not supported ,Supported Color Encoding Formats : RGB 4:4:4 ,Other Feature Support Flags : No_sRGB, Preferred Timing Mode, No Display is continuous frequency (Multi-mode Base EDID and Extension Block)]	02	00000010
25	19 Red/Green Low Bits (RcRy/CcCy)	95	10010101
26	1A Blue/White Low Bits (BcBy/WcWy)	D5	11010101
27	1B Red X Rc = 0.580	94	10010100
28	1C Red Y Ry = 0.345	58	01011000
29	1D Green X Cc = 0.337	56	01010110
30	1E Green Y Cy = 0.556	8E	10001110
31	1F Blue X Bc = 0.159	28	00101000
32	20 Blue Y By = 0.134	22	00100010
33	21 White X Wc = 0.313	50	01010000
34	22 White Y Wy = 0.329	54	01010100
35	23 Established timing 1 (Optional_00h if not used)	00	00000000
36	24 Established timing 2 (Optional_00h if not used)	00	00000000
37	25 Manufacturer's timings (Optional_00h if not used)	00	00000000
38	26 Standard timing ID1 (Optional_01h if not used)	01	00000001
39	27 Standard timing ID1 (Optional_01h if not used)	01	00000001
40	28 Standard timing ID2 (Optional_01h if not used)	01	00000001
41	29 Standard timing ID2 (Optional_01h if not used)	01	00000001
42	2A Standard timing ID3 (Optional_01h if not used)	01	00000001
43	2B Standard timing ID3 (Optional_01h if not used)	01	00000001
44	2C Standard timing ID4 (Optional_01h if not used)	01	00000001
45	2D Standard timing ID4 (Optional_01h if not used)	01	00000001
46	2E Standard timing ID5 (Optional_01h if not used)	01	00000001
47	2F Standard timing ID5 (Optional_01h if not used)	01	00000001
48	30 Standard timing ID6 (Optional_01h if not used)	01	00000001
49	31 Standard timing ID6 (Optional_01h if not used)	01	00000001
50	32 Standard timing ID7 (Optional_01h if not used)	01	00000001
51	33 Standard timing ID7 (Optional_01h if not used)	01	00000001
52	34 Standard timing ID8 (Optional_01h if not used)	01	00000001
53	35 Standard timing ID8 (Optional_01h if not used)	01	00000001



LP141WX5
Liquid Crystal Display

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

Byte	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)	
Timing Descriptor #1	54	36 Pixel Clock/10,000 (LSB) 74.8 MHz@ 60.1Hz	38	00111000	
	55	37 Pixel Clock/10,000 (MSB)	1D	00011101	
	56	38 Horizontal Active (HA) (lower 8 bits) 1280 Pixels	00	00000000	
	57	39 Horizontal Blanking (HB) (lower 8 bits) 192 Pixels	C0	11000000	
	58	3A Horizontal Active / Horizontal Blanking(HA HB)(upper 4:4bits)	50	01010000	
	59	3B Vertical Active (VA) 800 Lines	20	00100000	
	60	3C Vertical Blanking (VB)(DE Blanking typ for DE only panels) 46 Lines	1E	00101110	
	61	3D Vertical Active / Vertical Blanking (VA VB) (upper 4:4bits)	30	00110000	
	62	3E Horizontal Front Porch in pixels (HF) (lower 8 bits) 54 Pixels	36	00110110	
	63	3F Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 44 Pixels	2C	00101100	
	64	40 Vertical Front Porch in lines (VF) (lower 4 bits) : Vertical Sync Phase Width in lines (VS) (lower 4 bits) 9 Lines : 8 L	98	10011000	
	65	41 Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)	00	00000000	
	66	42 Horizontal Video Image Size (mm)(lower 8 bits) 304 mm	30	00110000	
	67	43 Vertical Video Image Size (mm)(lower 8 bits) 190 mm	BE	10111110	
	68	44 Horizontal Image Size / Vertical Image Size (upper 4 bits)	10	00010000	
	69	45 Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000	
	70	46 Vertical Border = 0 (Zero for Notebook LCD)	00	00000000	
	71	47 Non-Interlace, Normal display, no stereo, Digital Separate [Vsync_NEG, Hsync_POS (outside of V-sync)]	1A	00011010	
	Timing Descriptor #2	72	48 Pixel Clock/10,000 (LSB) 49.87 MHz@ 40.1Hz	7B	01111011
		73	49 Pixel Clock/10,000 (MSB)	13	00010011
		74	4A Horizontal Active (HA) (lower 8 bits) 1280 Pixels	00	00000000
75		4B Horizontal Blanking (HB) (lower 8 bits) 192 Pixels	C0	11000000	
76		4C Horizontal Active / Horizontal Blanking(HA HB)(upper 4:4bits)	50	01010000	
77		4D Vertical Active (VA) 800 Lines	20	00100000	
78		4E Vertical Blanking (VB)(DE Blanking typ for DE only panels) 46 Lines	1E	00101110	
79		4F Vertical Active / Vertical Blanking (VA VB) (upper 4:4bits)	30	00110000	
80		50 Horizontal Front Porch in pixels (HF) (lower 8 bits) 54 Pixels	36	00110110	
81		51 Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 44 Pixels	2C	00101100	
82		52 Vertical Front Porch in lines (VF) (lower 4 bits) : Vertical Sync Phase Width in lines (VS) (lower 4 bits) 9 Lines : 8 L	98	10011000	
83		53 Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)	00	00000000	
84		54 Horizontal Video Image Size (mm)(lower 8 bits) 304 mm	30	00110000	
85		55 Vertical Video Image Size (mm)(lower 8 bits) 190 mm	BE	10111110	
86		56 Horizontal Image Size / Vertical Image Size (upper 4 bits)	10	00010000	
87		57 Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000	
88		58 Vertical Border = 0 (Zero for Notebook LCD)	00	00000000	
89		59 Non-Interlace, Normal display, no stereo, Digital Separate [Vsync_NEG, Hsync_POS (outside of V-sync)]	1A	00011010	
Timing Descriptor #3		90	5A Flag	00	00000000
	91	5B Flag	00	00000000	
	92	5C Flag	00	00000000	
	93	5D Data Type Tag : Alphanumeric Data String (ASCII String)	FE	11111110	
	94	5E Flag	00	00000000	
	95	5F Dell P/N 1st Character = 6	36	00110110	
	96	60 Dell P/N 2nd Character = H	48	01001000	
	97	61 Dell P/N 3rd Character = W	57	01010111	
	98	62 Dell P/N 4th Character = V	56	01010110	
	99	63 Dell P/N 5th Character = V	56	01010110	
	100	64 EDID Revision Build Name = MP(X-Build) , Revision # = A00	80	10000000	
	101	65 Manufacturer P/N = 1	31	00110001	
	102	66 Manufacturer P/N = 4	34	00110100	
	103	67 Manufacturer P/N = 1	31	00110001	
	104	68 Manufacturer P/N = W	57	01010111	
	105	69 Manufacturer P/N = X	58	01011000	
	106	6A Manufacturer P/N = 5	35	00110101	
107	6B Manufacturer P/N (If < 13 char, then terminate with ASC II code 0Ah, set remaining char = 20h)	0A	00001010		



LP141WX5
Liquid Crystal Display

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)	
Timing Descriptor #4	108	6C	Flag	00	00000000
	109	6D	Flag	00	00000000
	110	6E	Flag	00	00000000
	111	6F	Data Type Tag : Descriptor Defined by manufacturer	00	00000000
	112	70	Flag	00	00000000
	113	71	Color Management [No +2 FRC Support, True Color Depth : 6 bit]	00	00000000
	114	72	Panel Type [WLED], Configuration [Single light bar], Number Lamp or LED Light Bar [one]	41	01000001
	115	73	Frame Rate Details [Minimum Frame Rate : 40Hz, Maximum Frame Rate : 65Hz , Tonc provides native Intel DRRS / sDRRS support]	31	00110001
	116	74	Controller Interface and Maximum Luminance [SMBUS type, 220 nit]	16	00010110
	117	75	Front Surface / Polarizer [Anti-Glare, No Transflective], Pixel Structure [RGB v-stripe]	00	00000000
	118	76	Multi-Media Features [Color Management : NTSC, Dynamic Backlight Control : No]	00	00000000
	119	77	Multi-Media Features [Motion Blur : No support , Active Gamma Control : No support]	00	00000000
	120	78	Special Features [Wireless Enhancement Hardware : No support , In-Cell Scanner : No support]	00	00000000
	121	79	Special Features [Number of LVDS channels or eDP lanes : one , Overdrive : No , Interface : eDP , In-Cell Touch Support : No]	09	00001001
	122	7A	Special Features [BIST Support : yes , Electronic Privacy : No electronic privacy hardware support , 3-D Support : No]	01	00000001
123	7B	(If <13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	0A	00001010	
124	7C	(If <13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	20	00100000	
125	7D	(If <13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	20	00100000	
Checksum	126	7E	Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)	00	00000000
	127	7F	Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)	94	10010100